

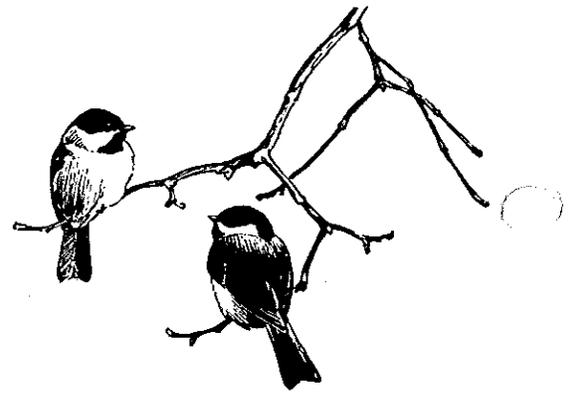


Figure 3
Chickadee Winter Roost Box

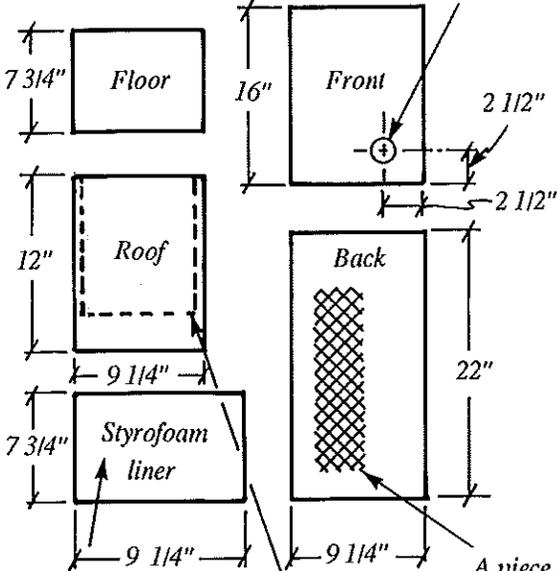

Six 1/4" birch dowels, 6" long, are inserted into holes drilled into one side; vertical spacing of 3" between rows, with dowels staggered. 1/4" diameter for dowel, drilled 1/2" into the board from the inside.

Lumber: One 1" x 8' 0".

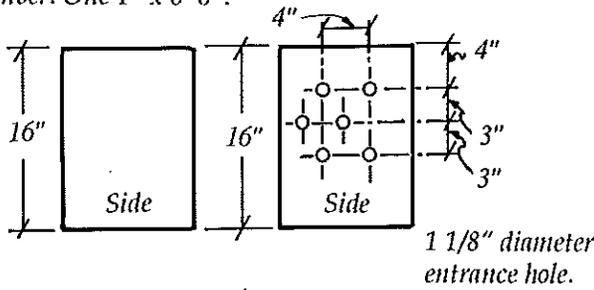



Glue or fasten to underside of roof for better insulation and tighter fit.

Position of styrofoam liner.

A piece of screen door screen is stapled to the back to aid birds in hopping up to dowels.

Roughen dowels with coarse sandpaper.

Mounting holes for nails or lag bolts.

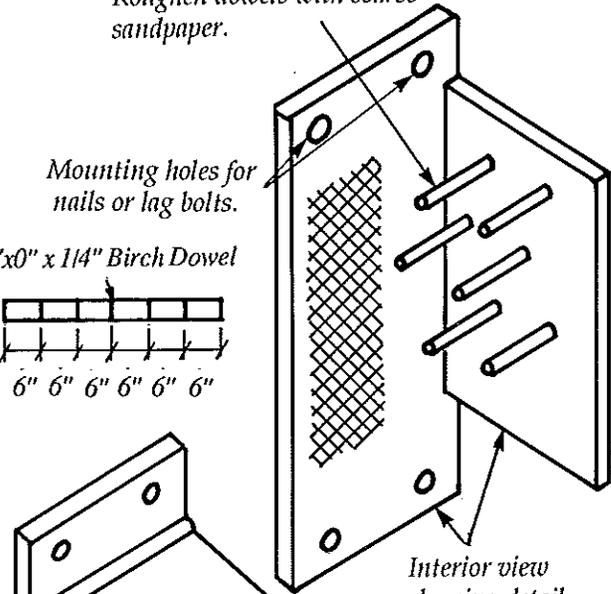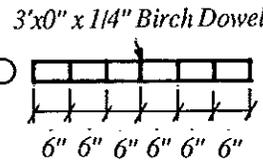

Interior view showing detail for side with dowels and back with screen.

Completed box.

Scratched or roughened surface provides "toe holds".

9 1/4" quarter round for rainguard

Nail quarter round to back, not roof, so roof is removable.

Waste

